

Zip Wall Fountain

Instant Chilled Filtered Drinking Water
Recessed Wall-Mounted Commercial Chiller



Recovery rates

Product Details	Recovery glasses/hr
Wall Fountain	140

Features

- Recessed instant chilled filtered water perfect for when space is at a premium
- Suitable for installing in busy corridors
- Equipped with carafe filler and bubbler
- Lockable front panel access
- Stainless steel case construction

**Efficient air cooled refrigeration system
that costs only cents a day in energy running costs!**

Zip Wall Fountain

Instant Chilled Filtered Drinking Water
Recessed Wall-Mounted Commercial Chiller



Instant Boiling Water

Description

- Wall-recessed instant chilled filtered water perfect for public corridors.
- Equipped with swivel head carafe filler and push action bubbler.
- Delivers up to 140 glasses per hour of chilled filtered water within the operating range of 5°C to 10° C.
- Complete with two 5-micron fully encapsulated carbon filters connected in parallel for extra life.
- Stainless steel water bowl and brushed stainless steel case with lockable front access panel.
- ø12.7mm BSP water connections.
- Air cooled refrigeration system with a compressor rating of .25 hp.

Warranty

One year parts and labour warranty

Installation

A. Location

To be positioned where it is easy for users to access.

Should be recessed into a suitable wall allowing appropriate access.

Water, drainage and power should be nearby within length of connections provided.

B. Electrical

To be connected to a 10amp GPO, 220V - 240V AC power supply and in accordance with AS/NZS 3350 wiring regulations.

C. Plumbing

To be installed by a qualified tradesperson in accordance with manufacturer's instructions and AS/NZS 3500 plumbing regulations.

Water connections 12.7 mm BSP.

Designed for direct connection to a potable cold water supply with minimum pressure of

70kPa; maximum 700kPa.

If static pressure exceeds 700kPa, a 500kPa pressure limiting valve must be fitted.

D. Caution

In some hard water areas where mineral scale accumulation may be a problem, consideration should be given to the maintenance required. A suitable form of water treatment may be necessary. Dripping will cease.

E. Accessories


99015 - Disposable cup dispenser

52000 - 5-micron replacement filter

58000 - Sub-micron replacement filter

**Refer to Zip Chilled Filtered Water Brochure for more information*

Typical Installation

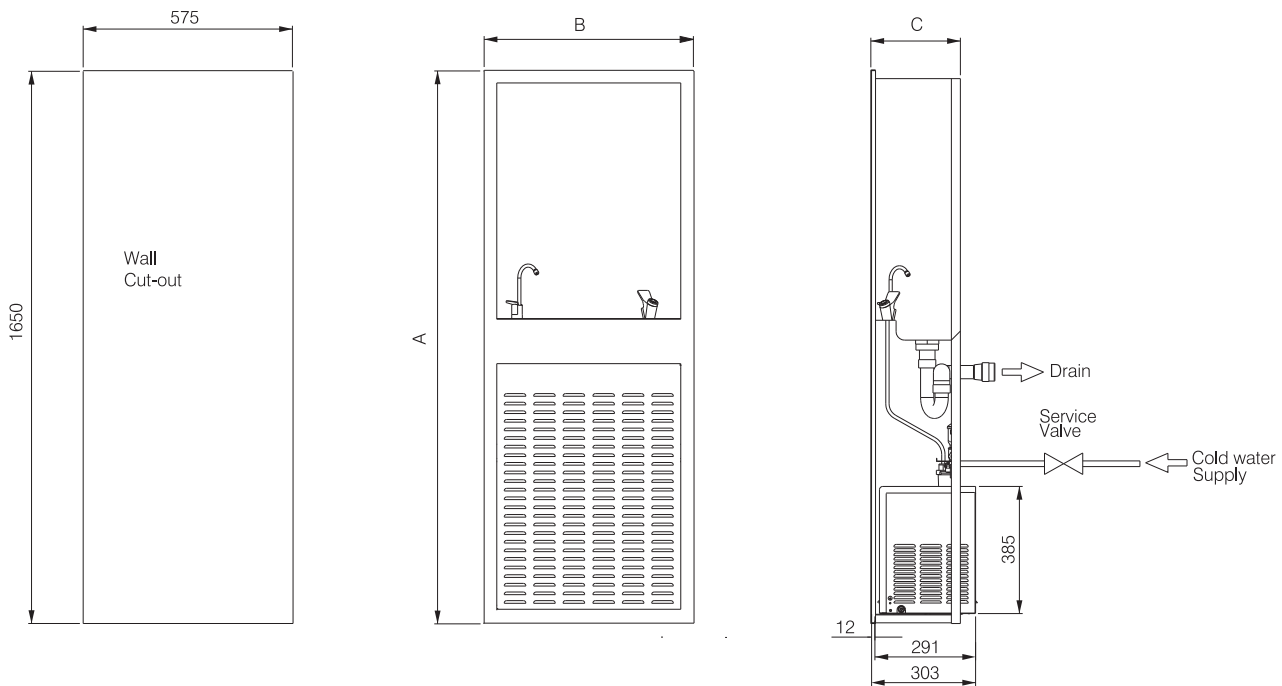

Note: Drawing is for specification purposes and carafe may differ from that depicted.

Product Selection Chart

Product Details	Double bowl 5 micron filter	Tank Capacity	**Recovery glasses [^] p/hr	Compressor (hp)	Dimensions (mm)		
					A	B	C
Zip Wall Fountain	63018	1.8L	140	0.25	1670	635	270#

[^] Standard glass = 200mL. Rating shown represents the number of glasses that may be drawn within the specified temperature range of 5°C to 10°C. ^{**}Actual outlet temperature may vary as a result of variations in water inlet temperature and ambient air temperature.

Note: Depth represents frame only. Chiller unit is wider than frame at 291mm plus 12mm clearance.